

Citation for published version:

O'Kane, S, Foster, J, Cave, J, Courtier, N, Richardson, G & Walker, A 2016, 'Modelling ion motion in perovskite films', 2nd International Conference on Perovskite Solar Cells and Optoelectronics, Genova, Italy, 26/09/16 - 28/09/16.

Publication date:
2016

Document Version
Publisher's PDF, also known as Version of record

[Link to publication](#)

University of Bath

Alternative formats

If you require this document in an alternative format, please contact:
openaccess@bath.ac.uk

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Modelling ion motion in perovskite films

Simon E. J. O'Kane¹, Jamie M. Foster², James M. Cave¹, Nicola Courtier³,
Giles Richardson³ and Alison B. Walker¹

¹Department of Physics, University of Bath, BA2 7AY, United Kingdom

²Department of Mathematics, University of Portsmouth, PO1 2UP, United Kingdom

³Department of Mathematical Sciences, University of Southampton, SO17 1BJ, United Kingdom

Contact: S.E.J.O'Kane@bath.ac.uk, G.Richardson@soton.ac.uk, A.B.Walker@bath.ac.uk



UNIVERSITY OF
BATH



University
of Southampton



SUPERGEN
SuperSolar

Motivation

In previous work [1], we have used an asymptotic approximation to solve the drift-diffusion equations for ion motion in perovskite films, while others have used finite difference methods. Here, we test the suitability of two different numerical methods - finite difference and spectral - for this challenging problem.

Conclusions

1. The spectral method Chebfun can solve the problem for average ion density of up to $3.2 \times 10^{18} \text{ cm}^{-3}$ using 5000 time steps
2. Finite difference method is also suitable but sub-nanometre spatial resolution is required to resolve the thin charge accumulation layers correctly
3. Unlike the asymptotic approximation, numerical methods can be used to create a fully coupled model that accounts for the electrostatic effect of electrons and holes. This is very challenging but some preliminary results have been obtained

Two of the best methods available in MATLAB for solving partial differential equations, such as the time-dependent drift-diffusion equations, are the built-in function **PDEPE** and the open-source additional module **Chebfun** [2].

PDEPE is a finite-difference method that solves the equations on a user-defined mesh with adaptive time step.

Chebfun is a spectral method that solves equations with a spectrum of functions (in this case Chebyshev polynomials) and therefore does not use a mesh. Instead, the user defines the time steps.

PDEPE

Chebfun

Advantages

- Fast (when it works)
- Automatic time stepping
- Suitable for very large ion densities ($\sim 10^{19} \text{ cm}^{-3}$)

Disadvantages

- Inaccurate if insufficient spatial resolution used
- Cannot deal with internal boundaries

- When solution found, it is very accurate
- High spatial resolution (no mesh)
- Can work with internal boundary conditions

- Can be slow
- Careful choice of time step required
- Struggles with very large ion densities ($> 3.5 \times 10^{18} \text{ cm}^{-3}$)

Table 1: Advantages and disadvantages of the PDEPE and Chebfun methods.

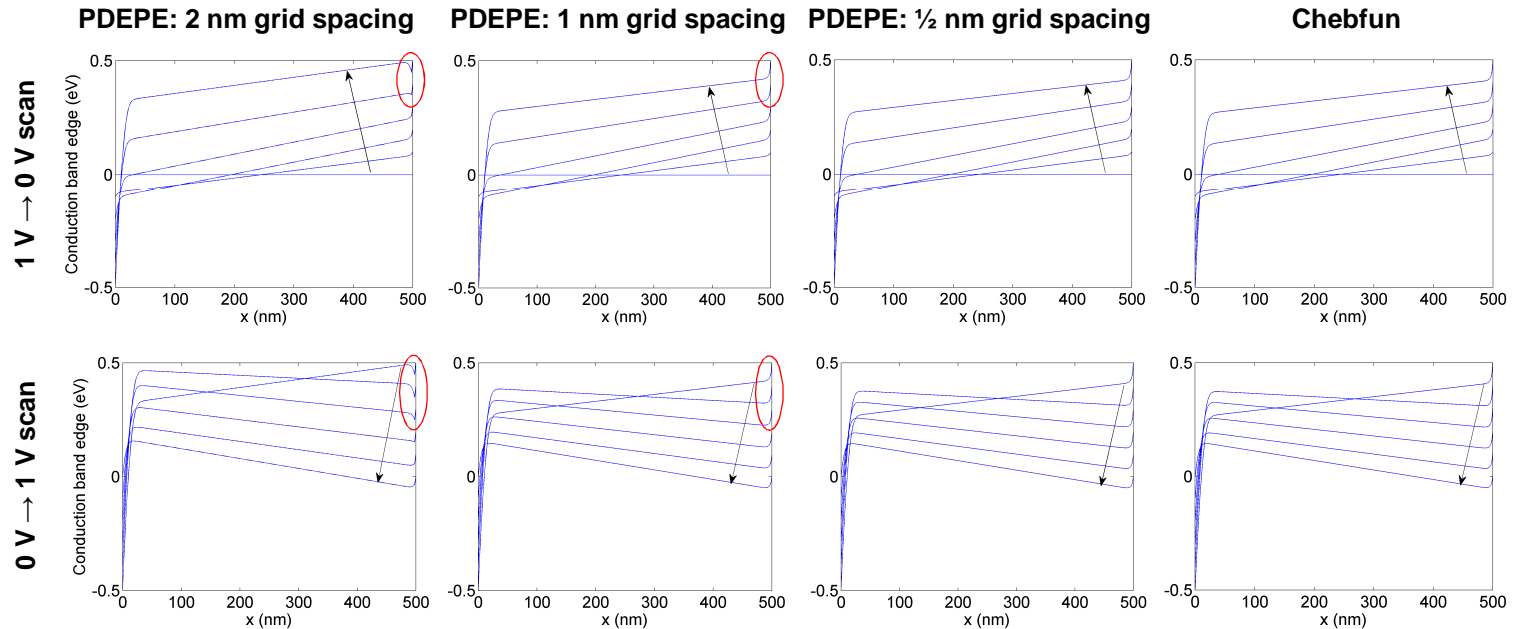


Table 2: Variation of conduction band minimum $E_c(x)$ across a 500 nm thick perovskite film during a scan from $V_{bi} = 1 \text{ V}$ to short circuit and back, as calculated using PDEPE with three different values of grid spacing and Chebfun with 5000 time steps. An average ion density of $3.2 \times 10^{18} \text{ cm}^{-3}$, close to the limit of what Chebfun can handle, was assumed. Each line represents a step of 0.2 V; the arrow indicates the direction of increasing time. The results for 1 nm grid spacing, 0.5 nm grid spacing and Chebfun show good agreement, while those for 2 nm grid spacing are different, suggesting 1 nm or smaller grid spacing is required.

References

- [1] G. Richardson, S. E. J. O'Kane, R. G. Niemann, T. A. Peltola, J. M. Foster, P. J. Cameron and A. B. Walker, "Can slow-moving ions explain hysteresis in the current-voltage curves of perovskite solar cells?", *Energy Environ. Sci.*, Vol. 9, 1476-1485, 2016.
- [2] T. A. Driscoll, N. Hale and L. N. Trefethen, *Chebfun Guide*, Panufty Publications, Oxford, 2014.